

Dry Contact Pulse Counter

Designed to monitor electrical, gas, and water meters, as well as other measurement devices that have a dry contact pulse output feature. This device, belonging to the PRO sensor series, includes Aranet Sub-GHz ISM band radio which wirelessly transmits sensor measurements to the Aranet PRO base station.



Product numbers

| Product number | Radio band | To be used in |
|----------------|------------|---|
| TDSPIC02.010 | EU868 | European Union |
| TDSPICU2.010 | US920 | United States of America, Canada, South America, Australia, New Zealand |
| TDSPICU2.010 | AS923 | BRN, KHM, HKG, IDN, LAO, TWN, THA, VNM, MYS, SGP |
| Not available | JP923 | Japan |
| TDSPICU2.010 | KR923 | South Korea |

Pulse measurement performance

| | |
|---------------------------------|-------|
| Maximum pulse frequency | 25 Hz |
| Minimum pulse width | 10 ms |
| Minimum interval between pulses | 30 ms |

Probe cable specifications

| | | |
|---------------------------------|--------------------------|------------|
| Length | 1 m | 3.3 ft |
| Cable material | Polyvinyl chloride (PVC) | |
| Operating temperature (flexing) | -5–70 °C | 23–158 °F |
| Operating temperature (fixed) | -40–80 °C | -40–176 °F |

Cable color coding

- The connection of the transmitter to a dry contact output is unipolar. This means that either of the transmitter wires (brown and white) can be connected to either of the dry contact output terminals to enable proper functionality.

General specifications

| | | |
|-------------------------------|---|-------------|
| Ingress protection rating | IP68 | |
| Maximum operating temperature | -40–60 °C | -40–140 °F |
| Dimensions | ∅35×120 mm | ∅1.4×4.7 in |
| Weight (incl. battery) | 100 g | 3.5 oz |
| Enclosure material | ASA plastic | |
| Power supply | 1 pc AA battery | |
| Packaging includes | 1 pc AA alkaline battery, polyester string for hanging the device | |

Battery lifetime

| Measurement interval | Alkaline battery lifetime | Lithium battery lifetime |
|----------------------|---------------------------|--------------------------|
| 1 min | 1.4 years | 1.9 years |
| 2 min | 2.6 years | 3.5 years |
| 5 min | 5.2 years | 7.3 years |
| 10 min | 7.6 years | >10 years |

- Battery lifetime data has been obtained by mathematical extrapolation and is provided for descriptive purposes only and is not intended to make or imply any guarantee or warranty.
- Battery lifetime tests and calculations performed assuming device is at 20 °C (68 °F) and using *Fujitsu Premium LR6G07* (alkaline) and *Energizer Ultimate Lithium L91* (lithium) AA batteries as reference.
- The operating temperature range may vary based on the battery type used. Generally, the range for alkaline batteries is between -20–50 °C (-4–122 °F), whereas for lithium batteries, it is -40–60 °C (-40–140 °F).

Aranet radio parameters

| | | |
|----------------------------|-------------------|--------|
| Line of sight range | 3 km | 1.9 mi |
| Transmitter power | 14 dBm | 25 mW |
| Data transmission interval | 1, 2, 5 or 10 min | |
| Data protection | XXTEA encryption | |

Aranet radio bands and channels


| Radio band | Channel 1 | Channel 2 | Channel 3 | Channel 4 |
|------------|---------------------|---------------------|---------------------|---------------------|
| EU868 | 868.1 MHz | 868.3 MHz | 868.5 MHz | — |
| US920 | 917.3 and 922.9 MHz | 917.5 and 923.1 MHz | 917.7 and 923.3 MHz | 917.9 and 923.5 MHz |
| AS923 | 923.1 MHz | 923.3 MHz | — | — |
| JP923 | 923.0 MHz | 923.4 MHz | — | — |
| KR923 | 923.1 MHz | 923.3 MHz | — | — |

- This table outlines the radio channels utilized by Aranet Sub-GHz radio technology for transmitting sensor data to the base station, complying with the legislation in various regions. To determine availability of this product in your region and the corresponding channels used, refer to the *Product numbers* table at the beginning of this document.


Pairing process description

As part of the Aranet PRO product series, this device enables wireless sensor reading transmission to the Aranet PRO and PRO Plus base station. Here's how to pair the sensor with the base station:

- Place the sensor within 20 m (60 ft) of the base station during pairing. Once paired, it can communicate over a much greater distance (up to 3 km / 1.9 mi line of sight).
- If the sensor uses a power supply unit, unplug it. Open the sensor casing and remove the battery for at least 20 seconds. Alternatively (for newer hardware revisions), locate the PAIRING button on the sensor PCB which can be used to initiate pairing without the removal of battery.
- Access the SENSORS menu in the base station Web GUI. Set the measurement interval and select PAIR SENSOR to start the pairing process.
- Within a 2-minute window, insert the battery or press the PAIRING button on the sensor PCB (for newer hardware revisions) to initiate pairing.
- A successful pairing is indicated by the sensor appearing in the Web GUI and a specific LED blink sequence on the sensor PCB (one to three short blinks followed by a longer fade-out blink of the LED):

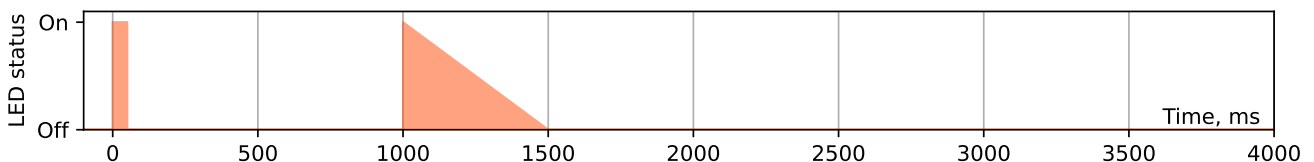

- If pairing fails, the sensor won't appear in the Web GUI, and the LED blink sequence will consist only of three short blinks. In this case, repeat the procedure closer to the base station.

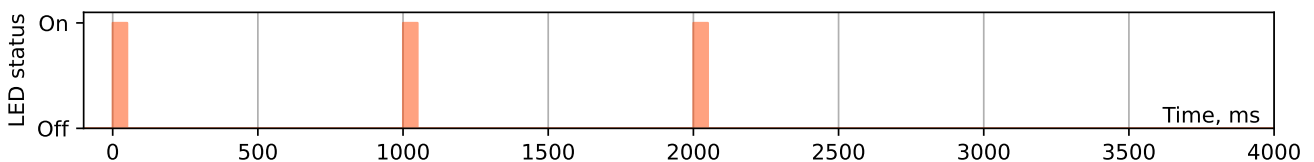

- After successful pairing, customize parameters like name and tags in the Web GUI. Close the sensor casing and install it in the desired location.

Compliance information

- CE** Conformité Européenne
 - FC** Federal Communications Commission (USA)
 - IC** Innovation, Science and Economic Development Canada
-

Korea certification mark label

R-R-A4A-TDSPICU2

| | |
|------------------------|---------------------------|
| Company name | SAF Tehnika JSC |
| Equipment name | Dry Contact Pulse Counter |
| Model name | TDSPICU2 . 010 |
| Manufacturer / Country | SAF Tehnika JSC, Latvia |
