


NA6 DIGITAL METER WITH BARGRAPH


FEATURES:




INPUTS:



OUTPUTS:



GALVANIC ISOLATION:




Lack of galvanic isolation between channels

Export department:
+48 68 45 75 139 / 305/
321 / 386

Fax: +48 68 32 54 091
e-mail: export@lumel.com.pl


LUMEL S.A.
ul. Słubicka 1
65-127 Zielona Góra
POLAND
WWW.LUMEL.COM.PL

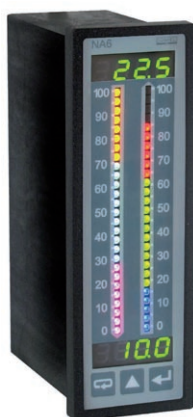

- 2 independent measuring channels with an universal input,
- 3 or 7-colour bargraph with programmable colour switching over,
- Recording of 750 measuring segments, released temporary,
- Programmable indication characteristic and bargraph magnifier,
- Up to 8 programmable alarm outputs,
- Mathematical operations on channels,
- Communication in SCADA systems (RS485/Modbus interface),
- Conversion of measured quantity into an analog standard signal for automation systems.

EXAMPLE OF APPLICATION

Measurement of level and temperature in a tank

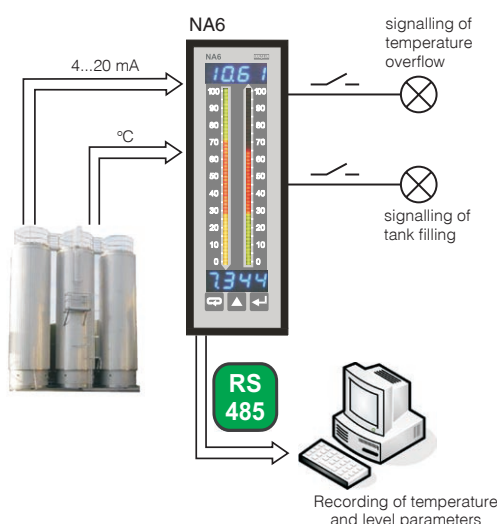

INPUTS

Kind of input	Measuring range	Measurement subrange
Pt100	-200...850°C	320°C
Pt500	-200...850°C	230°C
Pt1000	-200...850°C	290°C
J (Fe-CuNi)	-100...1100°C	350°C, 700°C
K (NiCr-NiAl)	-100...1370°C	450°C, 950°C
N (NiCrSi-NiSi)	-100...1300°C	550°C, 1000°C
E (NiCr-CuNi)	-100...850°C	250°C, 520°C
R (PtRh13-Pt)	0...1760°C	
S (PtRh10-Pt)	0...1760°C	
T (Cu-CuNi)	-50...400°C	
Resistance	0...10 kΩ	110 Ω, 220 Ω, 460 Ω, 950 Ω, 2100 Ω, 5000 Ω,
Voltage	± 300 mV, Rinp. > 9 MΩ ± 0...600 V, Rinp. > 4.2 MΩ	19 mV, 35 mV, 75 mV, 155 mV, 5 V, 11 V, 22 V, 45 V, 90 V, 180 V, 360 V
Current	± 40 mA, Rinp. < 4 Ω ± 5 A, Rinp. = 10 mΩ ± 10%	5 mA, 11 mA, 23 mA, 1.8 A, 3.8 A

Intensity of current flowing through the resistance thermometer: < 400 µA
Resistance of wires connecting the resistance thermometer with the meter: < 20 Ω/1 wire

OUTPUTS

Kind of output	Features
Analog output	• galvanically isolated with resolution 0.025% of range; current programmable 0/4...20 mA, load resistance ≤ 500 Ω or voltage programmable 0...10 V, load resistance ≥ 500 Ω, output response time: 100 ms.
Relay output	• 4 electromagnetic relays; NOC voltageless contacts, maximal load-carrying capacity: - voltage: 250 V a.c., 150 V d.c. - current: 5 A 30 V d.c., 250 V a.c. - resistance load: 1250 VA, 150 W
Open collector (OC) type	• voltageless of OC type with npn transistor, maximal load: 25 mA, range of appended voltages: 5...30 V d.c.
Digital	• interface type: RS-485; transmission protocol: MODBUS ASCII (8N1, 7E1, 7O1), RTU (8N2, 8E1, 8O1, 8N1); baud rate: 2400, 4800, 9600 bit/s
Additional supply output	• 24 V d.c., maximal load 20 mA

EXTERNAL FEATURES

Readout field	2 × 4 LED displays	7-segment digits of 7 mm high, measuring range -1999...9999
	bargraph	bargraph of 88 mm length: - 48 segments in three-colour version - 27 segments in seven-colour version
		Bargraph resolution: programmable
		Bargraph accuracy: ± 0.5 segment
Weight	< 0.4 kg	
Overall dimensions	48 × 144 × 100 mm	panel cut-out: 44 ^{+0,5} × 137.5 ^{+0,5} mm
Protection grade (acc. to EN 60529)	IP50 from frontal side	IP20 from terminal side

RATED OPERATING CONDITIONS

Supply voltage	95...253 V a.c./d.c., 20...40 V a.c./d.c.	Power consumption < 13 VA
Temperature	ambient: -10...23...55°C	Storage: -25...85°C
Relative humidity	< 95%	Condensation inadmissible

SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Pollution grade	2	
Installation category	III	
Maximal phase-to-earth operating voltage	input: 600 V	acc. to EN 61010-1
	supply: 300 V	
	relays: 300 V	
	analog output: 50 V	
	RS-485: 50 V	

TABLE 1. EXECUTION CODE:

NA6 -	X	XX	X	X	X	X	X	X	XX	X
Bargraph colour:										
three-colour (R, G, R+G)		T								
seven-colour (R, G, B, R+G, R+B, G+B, R+G+B)		M								
Display colour on channels 1 and 2:										
without display*		00								
red-red		RR								
red-green		RG								
red-blue		RB								
green-red		GR								
green-green		GG								
green-blue		GB								
blue-red		BR								
blue-green		BG								
blue-blue		BB								
Input signal:										
universal input			U							
Analog output signal:										
lack				0						
current programmable 0/4...20 mA				1						
voltage programmable 0...10 V				2						
Digital output signal:										
lack				0						
RS-485 output signal				1						
Additional output:										
lack*				0						
4 relays				4						
8 outputs of OC type				8						
Supply:										
95...253 V a.c./d.c.					1					
20...40 V a.c./d.c.					2					
Kind of terminals:										
screwed plug-in sockets						0				
Version:										
standard							00			
custom-made**							XX			
Acceptance tests:										
without an extra quality inspection certificate								8		
with an extra quality inspection certificate								7		
acc. to customer's request**								X		

* - in case of meters without displays, one must order an RS-485 digital output
** - after agreeing with the manufacturer

Ordering Example:

The code: **NA6 - M GB U 1 1 4 1 0 00 8** means:

- NA6** - digital meter with bargraph of NA6 type,
- M** - with a seven-color bargraph,
- GB** - green-blue display color on channel 1 and 2,
- U** - with an universal input signal,
- 1** - analog programmable output signal: 0/4...20 mA,
- 1** - RS-485 output signal,
- 4** - with additional 4 relays digital output signal,
- 1** - supply voltage: 95...253 V a.c./d.c.,
- 0** - terminals of plug-in socket type,
- 00** - standard version,
- 8** - without extra quality requirements.

CONNECTION DIAGRAMS

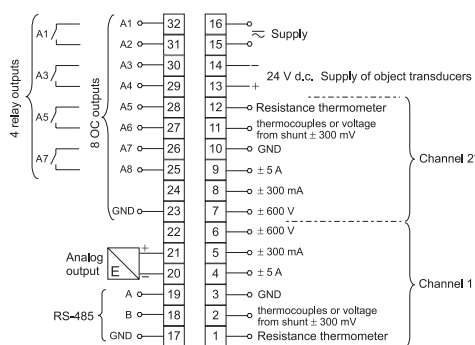


Fig. 1 Description of the terminal strip.

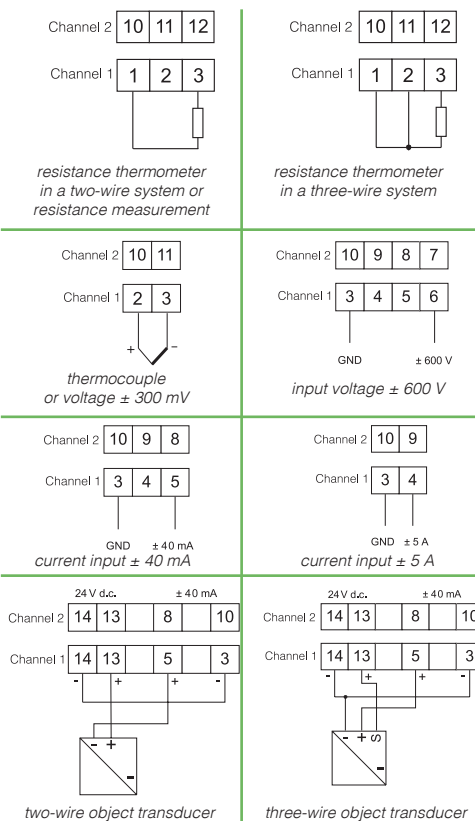


Fig. 2 Connection way of input signals.

SEE ALSO:



Temperature and humidity transducers P18 i P18L types.



N30 digital meters with a 3-colour display and free LPConfig program.



Visualization programs enabling to build distributed control and measuring systems like: LUMEL-CONTROL, LUMEL-PROCES, LUMEL3000.

OUR OFFER



www.lumel.com.pl

For more information about LUMEL's products please visit our website:
www.lumel.com.pl

Export department:

+48 68 45 75 139 /305/
321 / 386

Fax: +48 68 32 54 091
e-mail: export@lumel.com.pl

LUMEL S.A.
ul. Ślubicka 1
65-127 Zielona Góra
POLAND

WWW.LUMEL.COM.PL