


P18, P18D TEMPERATURE AND HUMIDITY TRANSDUCER
P18L TEMPERATURE OR HUMIDITY TRANSDUCER

FEATURES:



INPUT:



OUTPUTS:


4...20 mA

0..10 V

only P18, P18D

RS 485

only P18, P18D

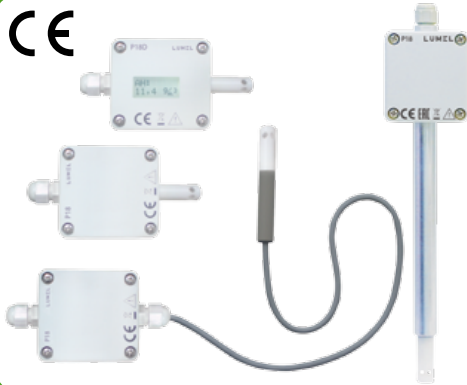


P18, P18D

- Built-in temperature and humidity sensor or with probe on 0.5 m wire or with an extended sensor.
- Calculation of selected physical quantities (dew-point temperature, absolute humidity).
- Interface RS-485 Modbus.
- 2 analog outputs 0/4...20 mA or 0...10 V (option).
- Standard d.c. current or d.c. voltage output signal
- Storage of measured and calculated maximum and minimum values
- Visualisation of measured value on a LCD display (only P18D).

P18L

- Built-in temperature and humidity sensor.
- Supply from current loop
- 1 analog output 4 ... 20 mA.

EXAMPLE OF APPLICATION

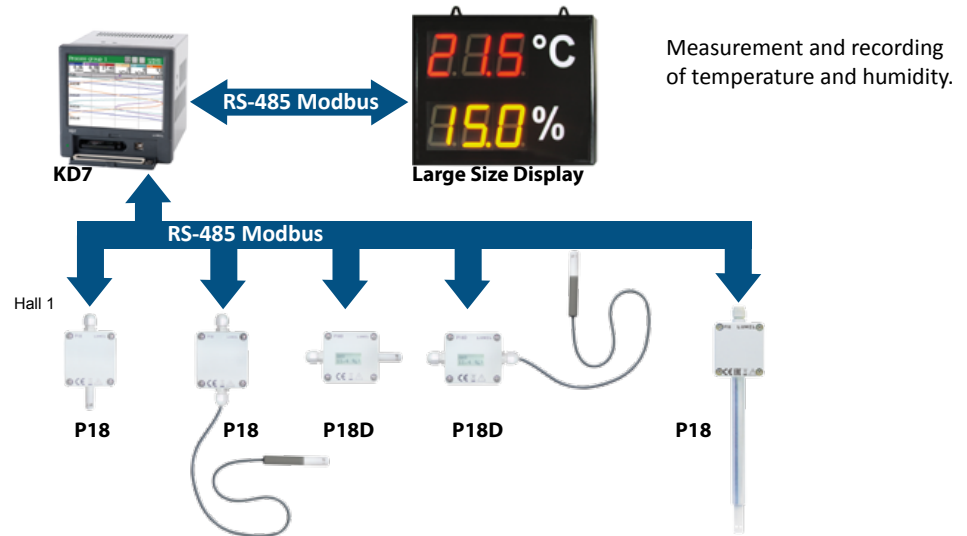

INPUTS

Input type	Measuring range	Error
Temperature	P18, P18D: -30 .. -20 .. 60 .. 85°C P18L: -30 .. -20 .. 60 .. 85°C	+/- 0.5%
Relative humidity	0 .. 100%	+/- 2% for RH = 10 .. 90% +/- 3% for RH in the remaining range

OUTPUTS

Output type	Admissible load resistance	Remarks
4 .. 20 mA	$R_{load} \leq 100 \Omega$	for P18/P18D
	$R_{load} \leq 500 \Omega$	P18L
0 .. 10 V	$R_{load} \geq 1 k\Omega$	only P18/P18D

DIGITAL INTERFACE (only P18/P18D)

Interface type	Transmission mode	Baud rate
RS-485 Modbus RTU	8N1, 8N2, 8E1, 8O1	4,8; 9,6; 19,2; 38,4; 57,6; 115,2 kbit/s

EXTERNAL FEATURES

Overall dimensions	38 × 58 × 118 mm	38 × 58 × 265 mm - version with extended sensor
Weight	125 g	270 g - version with extended sensor
Protection grade	ensured by the casing: IP65	
Fixing	on a wall	

RATED OPERATING CONDITIONS

Supply voltage	P18, P18D	9 .. 24 V d.c./a.c.	input power < 0.5 VA
	P18L	19 .. 30 V d.c.	input power < 1 VA
Temperature	ambient: -20...23...60°C		
Humidity	< 95%		
Operating position	any		in application not exposed to water contact
	sensor chamber towards the earth		in application exposed to water contact
Preheating time	15 minutes		
Air flow rate	≥ 0.5 m/s (P18/ P18D)		
	≥ 2 m/s (P18L)		

Export department:
+48 68 45 75 130/132

Fax: +48 68 32 54 091
e-mail: export@lumel.com.pl


LUMEL S.A.
ul. Stubiczka 4
65-127 Zielona Góra
POLAND

WWW.LUMEL.COM.PL


SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity	acc. to EN 61000-6-2
	noise emissions	acc. to EN 61000-6-4
Isolation between circuits	basic	
Pollution level	2	
Installation category	III	acc. to EN 61010-1
Maximal phase-to-earth operating voltage	50 V	
Altitude a.s.l.	< 2000 m	


CONNECTION DIAGRAM

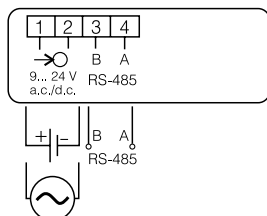

Transducer without analog outputs

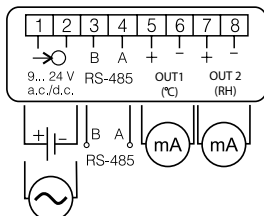

Transducer with current outputs

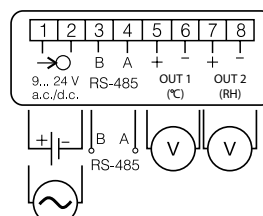

Transducer with voltage outputs

Fig. 1 Connection way of electric signals – P18, P18D.


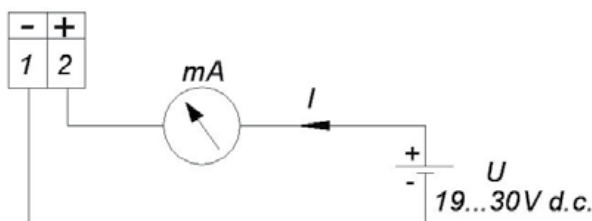


Fig. 2 Connection way of electric signals – P18L

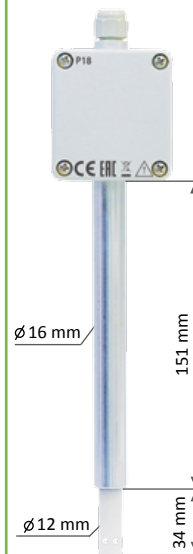

ORDERING

Code	Description
P18 000M0	Temperature and humidity transducer P18 without analog outputs; sensor on the housing; documentation and descriptions in Polish and English version, test certificate
P18 100M0	Temperature and humidity transducer P18 2x analog output 4-20mA; sensor on the housing; documentation and descriptions in Polish and English version, test certificate
P18 200M0	Temperature and humidity transducer P18 2x analog output 2x 0-10V; sensor on the housing; documentation and descriptions in Polish and English version, test certificate
P18D 000M0	Temperature and humidity transducer P18D with LCD display, without analog outputs; sensor on the housing; documentation and descriptions in Polish and English version, test certificate

Code	Description
P18D 100M0	Temperature and humidity transducer P18D with LCD display, 2x analog output 4-20mA; sensor on the housing; documentation and descriptions in Polish and English version, test certificate
P18D 200M0	Temperature and humidity transducer P18D with LCD display, 2x analog output 0-10V; sensor on the housing; documentation and descriptions in Polish and English version, test certificate
P18L 000	Temperature and humidity transducer P18L, built-in temperature and humidity sensor, supplied from a current loop, 1 x analog output 4 ... 20 mA; test certificate

Table 1

Order code	Design	Name	Construction	Features	Typical application
20-015-00-00011		Membrane filter	Casing made of PCV, membrane of teflon, laminated by a film. Pore size: 1 µm	Mean filtration effect. Maximal temp.: up to 80 °C Response time: t10/90:15 s	Building automation. In rooms with low pollution.
20-015-00-00007		Filter made of teflon	Sintered teflon. Pore size: 50 µm	High chemical resistance Maximal temp.: up to 180 °C Response time: t10/90:14 s	Drying process in chemical applications.
20-015-00-00003		Filter made of sintered bronze	Sintered bronze. Pore size: 60 µm	High mechanical resistance. To co-operate in high pollution environments. Applied at small air humidity Response time: t10/90:10 s	Agricultural applications.

Export department:
+48 68 45 75 130 /132

Fax: +48 68 32 54 091
e-mail: export@lumel.com.pl

LUMEL S.A.
ul. Słubicka 4
65-127 Zielona Góra
POLAND
WWW.LUMEL.COM.PL