

Highlights

- Multiple sensor design (up to 8 heads for 1 box)
- Plug & Play (automatic head detection from the box)
- Broad measurement range covered by one single model
- Short wavelength heads for high temperatures
- Dedicated 5 μm head for measuring of glass
- Extended temperature range for LT head up to 1000°C
- Laser sighting for 1M/2M sensing heads
- Spot sizes down to 0,5 mm (with Close Focus Lens)
- Fast 10 ms response time
- Industrial rugged head cable (PUR): Silicone and Halogen free, resistant against oil, bases, and acids
- Networkable OEM head model (without a box)

Measurement Specifications

Temperature Range	
LT02, LT10	-40 to 600°C
LT20, LTF	0 to 1000°C
G5	250 to 1650°C
1M	500 to 1800°C
2M	250 to 1400°C
Spectral Response	
LT	8 – 14 μm
G5	5 μm
1M	1 μm
2M	1.6 μm
Optical Resolution¹	
LTS (standard)	2:1, 10:1, 22:1 typ., 21:1 guaranteed
LTF (fast)	10:1
G5	22:1 typ., 21:1 guaranteed
1M, 2M	100:1
SF1 Optics	2 mm spot @ 200 mm distance
SF3 Optics	22 mm spot @ 2200 mm distance
Accuracy²	
LT, G5	$\pm(1\% \text{ of reading or } 1^\circ\text{C})^{3,4}$
1M, 2M	$\pm(0.5\% + 2^\circ\text{C})$
Repeatability	
LT, G5	$\pm 0.5\% \text{ of reading or } \pm 0.5^\circ\text{C}^3$
1M, 2M	$\pm(0.25\% + 1^\circ\text{C})$
Temperature Coefficient	
LT, G5	$\pm 0.05\text{K} / \text{K}$ or $\pm 0.05\% / \text{K}$ of reading ³
1M, 2M	$\pm 0.01\% / \text{K}$ of reading
Response Time⁵	
LTS (standard)	130 ms
LTF (fast)	20 ms
G5	55 ms
1M, 2M	10 ms

¹ 90% energy

² at ambient temperature 23°C $\pm$ 5°C, $\epsilon = 1.0$, and calibration geometry

³ whichever is greater

⁴ $\pm 2^\circ\text{C}$ for target temperatures < 20°C

⁵ 90% value

Raytek Compact Series

MI3 Heads


Datasheet





General Specifications

Ambient Temperature	
LT, G5	-10 to 120°C
1M, 2M	0 to 120°C
Laser (1M, 2M)	automatic switch off at 65°C
Storage Temperature	
-20 to 120°C	
Environmental Rating	
IP65	
EMC	
EN 61326-1:2006	

Dimensions

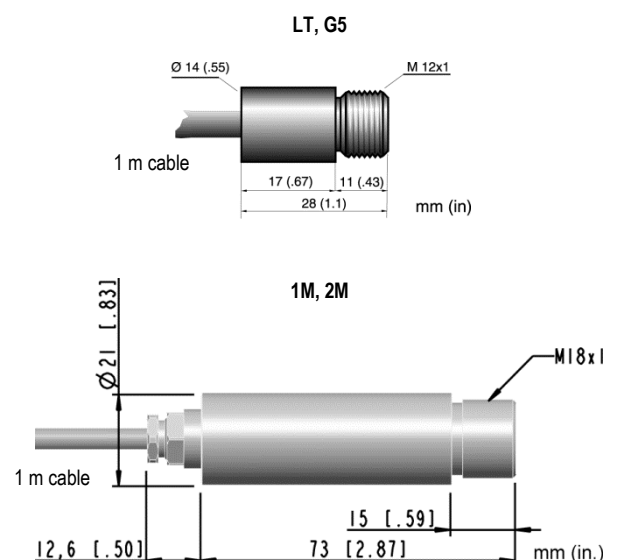

Optical Specifications (90% energy)

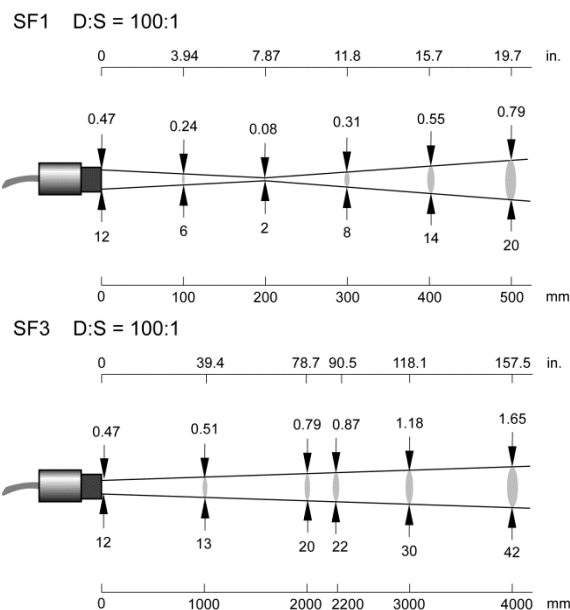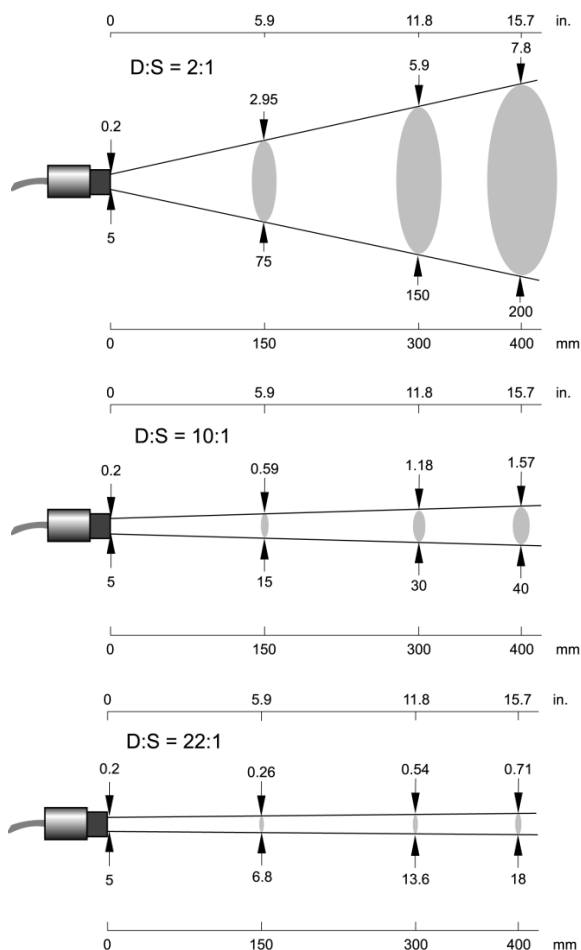

Options

Options must be specified at time of order.

- Longer head cable lengths: 3 m, 8 m, 15 m, 30 m
- Networkable OEM sensing head without the need for a box

Accessories

Accessories include items that may be ordered at any time and added on-site:

- Adjustable Mounting Bracket
XXXMIACAB for LT, G5 / XXXMI3100ADJB for 1M, 2M
- Air Cooling Jacket (XXXMIACCJ: 0.8 m, XXXMIACCJ1: 2.8 m) for ambient temperatures up to 200°C (LT, G5 only)

Air Purge Jacket



for LT, G5 heads
(XXXMIACAJ)



for 1M, 2M heads
(XXXMI3100AP)

www.raytek.com

52201, Rev. C1, 03/2012 - Raytek and the Raytek logo are registered trademarks of Raytek Corporation. Specifications subject to change without notice. Raytek is ISO 9001 certified.

Worldwide Headquarters
Santa Cruz, CA USA
Tel: +1 831 458 - 3900
+1 800 227 - 8074
solutions@raytek.com

United Kingdom
ukinfo@raytek.com

European Headquarters
Berlin, Germany
Tel: +49 30 47 80 08 0
Fax: +49 30 4 71 02 51
raytek@raytek.de

France
info@raytek.fr



Raytek®
A Fluke Company