

Intrinsically Safe Submersible Transmitters

ATM/N/Ex - Analog Level Transmitter



CUSTOMER BENEFITS

- Certificate: ATEX
- Fast customization thanks to configurable product design
- Compact design requires minimal space
- Short response times suitable for dynamic pressure measurements

Technical Specifications

PRESSURE MEASURING RANGE (MH₂O)

	1 ... 5 (1)	> 5 ... 20	> 20 ... 250
Overpressure	3 bar	3 x FS ($\geq$ 3 bar)	3 x FS
Burst pressure, (2)	> 200 bar	> 200 bar	> 200 bar
Accuracy, (3) ($\pm$ % FS)	$\leq 0.5 / \leq 0.25$	$\leq 0.5 / \leq 0.25 / \leq 0.1$	$\leq 0.5 / \leq 0.25 / \leq 0.1$
Thermal shift ($\pm$ % FS/°C)			
Zero point 0 ... 70°C	≤ 0.06	≤ 0.03	≤ 0.015
Zero point -25 ... 85°C	≤ 0.08	≤ 0.04	≤ 0.02
Span 0 ... 70°C	≤ 0.015	≤ 0.015	≤ 0.015
Span -25 ... 85°C	≤ 0.02	≤ 0.02	≤ 0.02
Response time, (typ.)	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS
Long term stability, (4)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

(1) 0.5 mH₂O on request

(2) Transducer

(3) Zero based accuracy according to DIN-16086, incl. hysteresis and repeatability at ambient temperature



(4) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

TEMPERATURE RANGE

Operating temperature	-5 ... 80°C (1)
Process temperature	-5 ... 80°C (1)
Storage temperature	-10 ... 80°C

(1) For operating temperature > 50°C, PE or FEP cable must be used

ELECTRICAL SPECIFICATIONS

	4 ... 20 mA
Power supply	10 ... 30 VDC
Supply influence	< 0.1% FS
Circuit diagram	
Load resistance	
Load influence	< 0.1% FS

ATEX APPROVAL

Certificate, (1)	SEV 11 ATEX 0142	
Gas	II 1G Ex ia IIC T3 ... T6	EN 60079-0 / -11 / -26
Dust	II 1D Ex iaD 20 IP6x T125°C ... T80°C	
Mining	I M1 Ex ia I	EN 50303
Temperature class, (2)	T6	T4
Ambient temperature	-5 ... 50°C	-5 ... 80°C
Process temperature	-5 ... 50°C	-5 ... 80°C
Maximum values of the intrinsically safe circuit	30 V / 100 mA / 1 W	

(1) For detailed Ex specifications see certificate and operating an safety instructions

(2) Without any information about temperature class the transmitter will be delivered for T4

GL APPROVAL

Certificate	40869-01 HH
Field of application	C, EMC1

QUALIFICATIONS

	Description	Level	Typical interferences
EN 61000-4-2	Electrostatic discharge	4 kV contact / 8 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08 ... 1 GHz, 3s)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	2 kV	Motors, valves
EN 61000-4-5, (1)	Surge	10 kA (8 / 20 µs)	Overvoltage
EN 61000-4-6	Conducted RF	10 V (0.15 ... 80 MHz, 3 s)	Frequency converters

(1) Only with optional overvoltage protection

PHYSICAL SPECIFICATIONS

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (standard), EPDM, Kalrez
Cable	PUR, FEP
Weight (2)	108 g

(1) Hastelloy (C-276) on request

(2) Specification for a ATM/N/Ex, closed, without cable

Equipment

OVERVIEW

10.00.0091	Accessories overview

Additional documents

OPERATING AND SAFETY INSTRUCTIONS

Article number	
10.88.0437	DMM042

Ordering information

		X.	XXXX.	XXXX.	XX.	XXX
Type						
	ATM/N/Ex	34				
Pressure type						
	Gauge	1				
	Absolute (vacuum)	2				
Pressure measuring range						
	50 mbar ... < 100 mbar	XX				
	100 mbar ... 25 bar	XX				
	Offset, special adjustment	99				
Process connection						
	Closed (Fig. 1)	55				
	Open (Fig. 2)	56				
	G 1/4 M (Fig. 3)	11				
	G 1/2 M (Fig. 3)	13				
	Customized	99				
Electrical connection						
	Connectable version, IP 68 (Fig. 4), (3)	07				
	PUR cable, blue, IP 68 (4), (5)	17				
	FEP cable, blue, IP 68 (4)	22				
	Customized	99				
Output signal						
	4 ... 20 mA	05				
	4 ... 20 mA with surge protection	08				
Accuracy						
	$\leq \pm 0.5$ % FS	0				
	$\leq \pm 0.25$ % FS	1				
	$\leq \pm 0.1$ % FS	2				
Temperature range						
	T6 (Ta: -5 ... 50°C) -5 ... 50°C compensated (allowed process temperature: -5 ... 50°C)	3				
	T4 (Ta: -5 ... 80 °C) -5 ... 80°C compensated (allowed process temperature: -5 ... 80°C)	5				
Option 1						
Option 2						
Option 3						
	Ballast weight 1.4435					B
	Seals: Viton (standard)					U
	Seals: EPDM					S
	Seals: Kalrez (Level)					T
	Version titanium (without ballast weight)					K
	Humidity filter element for gauge versions (only for PUR cable)					Z

(3) Connector with required cable has to be ordered separately (KART100)

(4) Please specify the required cable length and medium

(5) For operating temperature > 50°C, FEP cable must be used

Technical drawings

Dimensions

Fig. 1: Closed version

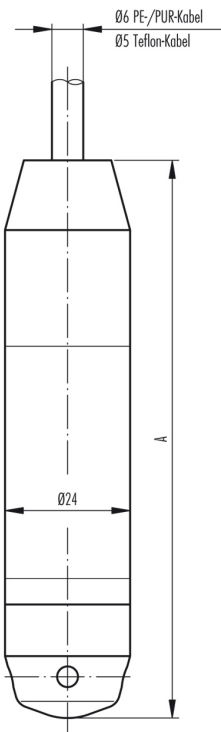


Fig. 2: Open version

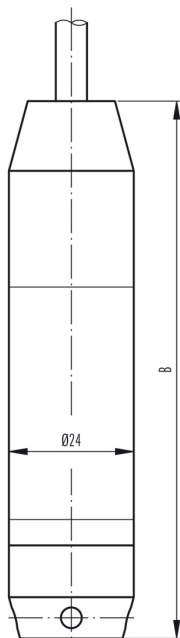


Fig. 3: with process connection


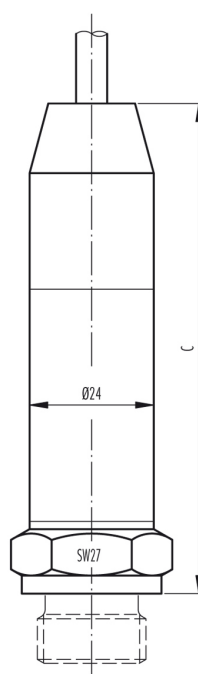


Fig. 4: Electrical connection, connectable

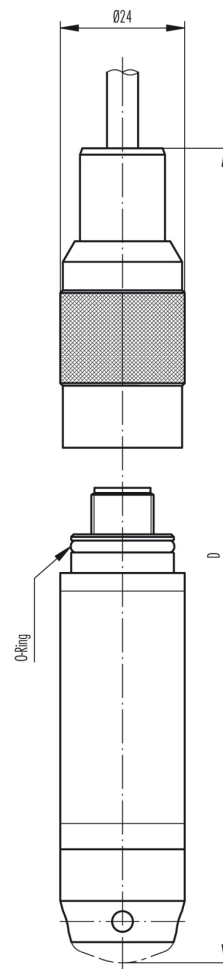

Standard	A [mm]	B [mm]	C [mm]	D [mm]	Weight[g]
without ballast weight	108	104	on request*	on request*	approx. 160
with ballast weight	195	191	on request*	on request*	approx. 420

*C: Depending on process connection

*D: Depending on process connection or version

Version with surge (lightning) protection	A [mm]	B [mm]	C [mm]	D [mm]	Weight [g]
without ballast weight	157	153	on request	on request	approx. 200
with ballast weight	244	240	on request	on request	approx. 460

Colour 2-Wire

white +Vin
yellow Pout
gray EP

Specifications may change without notice.

ST5 Headquarters, Switzerland:
ST5 Sensor Technik Sirmach AG
Rüthofstrasse 8 | 8370 Sirmach | Switzerland
sales@st5sensors.com | www.st5sensors.com

ST5 China:
ST5 Sensor Technology (Shanghai) Co. Ltd
Room 2603-2606 | North Building, Fortune | 108 Square
Lane 1839 | Qixin Road | Minhang District | Shanghai | China
sales@st5sensors.com | www.st5sensors.com.cn

ST5 France:
ST5 France
844 Route de la Caille | 74350 Allonzier la Caille | France
info-fr@st5sensors.com | www.st5sensors.fr

ST5 Germany:
ST5 Sensoren Transmitter Systeme GmbH
Poststrasse 7 | 71063 Sindelfingen | Germany
info-de@st5sensors.com | www.st5sensors.de

ST5 Great Britain:
ST5 Great Britain Ltd.
Box 3942 | Warwick | CV34 9AE | United Kingdom
contact@st5sensors.com | www.st5sensors.co.uk

ST5 Italy:
ST5 Italia s.r.l.
Via Lambro 36 | 20090 Opera (MI) | Italy
info-italia@st5sensors.com | www.st5sensors.it