

PICOSTAT PRESSURE SWITCH

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The 9B4 of the Picostat series is based on our long lasting experience in the shipbuilding and railway sector. This further improved version offers high vibration resistance within a compact body and is suitable for a wide temperature range.



Applications

- Shipbuilding
- Engine manufacturing
- Railways
- Machine tools



Features

- Improved vibration resistance
- Compact design
- Rugged housing
- Protection IP65
- Any mounting position possible

02/2017

Data sheet H72367n

Technical Data

Measuring principle	Bellow	Repeatability	± 0.5 % FS typ.
Measuring range	-0.6 ... 3.4 to 4 ... 40 bar -8 ... 45 to 60 ... 500 psi	Media temperature	Standard: -25°C ... +125°C with sensor 789/790/791: -40°C ... +125°C
Output signal	1 Floating change-over contact (SPDT)	Ambient temperature	Standard: -25°C ... +125°C with sensor 789/790/791: -40°C ... +125°C
Switching differential	Not adjustable	Approval / conformity	ABS, BV, CCS, DNV, GL, KRS, LRS, NKK, RINA, RMRS, EN60730-1/ EN60730-2-6: Typ 2.B.H

Subject to change

Ordering information/type code

				9B4 .	XX	XX	XXX	XX	XX
Microswitch	Standard ¹⁾				42				
	Standard  ¹⁾				33				
	Gold plated contacts ¹⁾				84				
Range	Range [bar]	Over pressure [bar]		Range [psi]	Over pressure [psi]				
	-0.6 ... 3.4	12	74	-8 ... 45	174	G4			
	0 ... 4	12	76	0 ... 50	174	G6			
	0 ... 6	12	77	0 ... 100	174	G7			
	1 ... 10	24	78	14 ... 150	348	G8			
	1 ... 16	24	79	14 ... 250	348	G9			
	2 ... 25	40	80	30 ... 400	580	H0			
	4 ... 40	50	81	60 ... 500	725	H1			
Sensor	Sensor material	Sensor housing material		Range					
	Bronze bellow (CuSn6)  ²⁾	Aluminium EN AW-6026 AlMgSiPb0.4 anodized		74		769			
	Bronze bellow (CuSn6)  ²⁾	Aluminium EN AW-6026 AlMgSiPb0.4 anodized		76, 77		770			
	Bronze bellow (CuSn6)  ²⁾	Aluminium EN AW-6026 AlMgSiPb0.4 anodized		78, 79		771			
	Bronze bellow (CuSn6)  ²⁾	Aluminium EN AW-6026 AlMgSiPb0.4 anodized		80, 81		772			
	Bronze bellow (CuSn6)  ^{3) 4)}	Brass (CuZn39Pb3)		74		789			
	Bronze bellow (CuSn6)  ^{3) 4)}	Brass (CuZn39Pb3)		76, 77		790			
	Bronze bellow (CuSn6)  ^{3) 4)}	Brass (CuZn39Pb3)		78, 79		791			
	Bellows stainless steel (1.4404/AISI316L) ⁴⁾	Stainless steel		76, 77		753			
Pressure connection	G1/8" female							02	
	G1/4" female							04	
	M10x1 female ⁵⁾							03	
Accessories	Flange with O-Ring ⁴⁾								11
	Female electrical connector EN 175301-803-A (DIN43650-A)								46
	Welsh plug G1/4"								74
	Fixing set								V3
	Covering cap								15
	Lead seal (manipulation protection)								16
	Switch point adjustment on customers request								
	Please indicate when ordering:								
	- Switchpoint including measurement unit (kPa, bar, MPa, psi, abs. or rel.)								88
	- Increasing or decreasing								
	Damping elements and snubber see data sheet H72258								

¹⁾ Switching differential not adjustable

²⁾ Media contacting O-Ring

³⁾ O-Ring not media contacting

⁴⁾ Only with pressure connection 04 (G1/4") others upon request

⁵⁾ Please ask us

Standard products (extra short lead time)


Product No.	Type Code	Pressure range [bar]	Over pressure max. [bar]	Switching differential [bar]
PST4B3.44	9B4 4274 769 04 0000 0000 15 46 V3	-0.6 ... 3.4	12	0.2 ± 0.1 (fixed)
PST4B64	9B4 4277 770 04 0000 0000 15 46 V3	0 ... 6	12	0.2 ± 0.1 (fixed)
PST4B164	9B4 4279 771 04 0000 0000 15 46 V3	1 ... 16	24	0.4 ± 0.2 (fixed)
PST4B254	9B4 4280 772 04 0000 0000 15 46 V3	2 ... 25	40	1.0 ± 0.6 (fixed)
PST4B404	9B4 4281 772 04 0000 0000 15 46 V3	4 ... 40	50	1.2 ± 0.8 (fixed)
PST4B3.4F4	9B4 4274 769 04 0000 0000 11 15 46 74 V3	-0.6 ... 3.4	12	0.2 ± 0.1 (fixed)
PST4B6F4	9B4 4277 770 04 0000 0000 11 15 46 74 V3	0 ... 6	12	0.2 ± 0.1 (fixed)
PST4B16F4	9B4 4279 771 04 0000 0000 11 15 46 74 V3	1 ... 16	24	0.4 ± 0.2 (fixed)
PST4B25F4	9B4 4280 772 04 0000 0000 11 15 46 74 V3	2 ... 25	40	1.0 ± 0.6 (fixed)
PST4B40F4	9B4 4281 772 04 0000 0000 11 15 46 74 V3	4 ... 40	50	1.2 ± 0.8 (fixed)
PST4B6S4	9B4 4277 753 04 0000 0000 15 46 V3	0 ... 6	12	0.2 ± 0.1 (fixed)
PST4B16S4	9B4 4279 754 04 0000 0000 15 46 V3	1 ... 16	24	0.4 ± 0.2 (fixed)

Specifications		
Accuracy	Repeatability	± 0.5 % FS typ.
	Switching differential	See table
	Adjustment range switchpoint ²⁾	10 % ... 90 % FS
	Temperature dependence switching point	-25°C ... +125°C: ca. -0.1% FS/°C typ. < -25°C: ca. -0.25% FS/°C typ.
Environmental conditions	Ambient temperature	Standard: -25°C ... +125°C with sensor 789/790/791: -40°C ... +125°C
	Media temperature	Standard: -25°C ... +125°C with sensor 789/790/791: -40°C ... +125°C
	Storage temperature	Standard: -30°C ... +125°C with sensor 789/790/791: -45°C ... +125°C
	Protection ¹⁾	IP65
	Humidity	Max. 95 % relative
	Vibration	Switch: IEC/EN 60068-2-6 10...59 Hz: ±0.75 mm Ampl. 59...500 Hz: 5 g
	Shock	50 g / 3 ms
Mechanical Data	Sensor	See ordering information
	Housing	Aluminium EN AW-6026 AlMgSiPb0.4 anodized
	Sealing	HNBR 75 Sh
	Housing seal	EPDM 75 Sh
	Male electrical plug	Polyamide (PA)
	Mounting torque	G 1/4": M _A = 32 ... 40 Nm
	Installation	any position
	Weight	~ 160 g
Microswitch	Rating	See table
	Resistance of insulation	500 VDC > 10 MΩ
	Dielectric strength	>1.5 kV AC/60 s terminal ground >500 VAC/60 s via open contacts
Electrical connection	Electrical connections	EN175301-803-A (DIN43650-A)
	Female electrical connector	Cable-Ø: 4 ... 9 mm Terminal screw: 4 x 0.5...1.5 mm ²


¹⁾ Provided female connector is mounted according to instructions

²⁾ Other adjustment ranges upon request


Dimensions

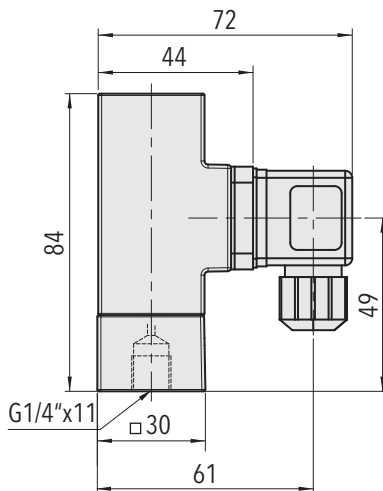

9B4.XXXX.7XX.04.46.V3

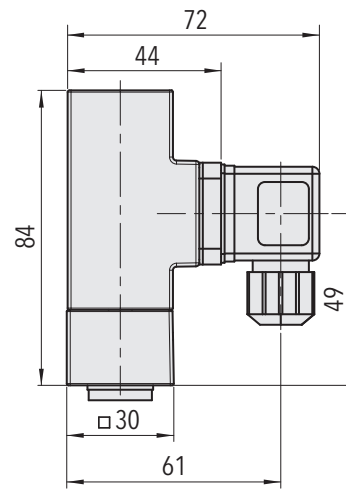


9B4.XXXX.7XX.04.11.46.74.V3

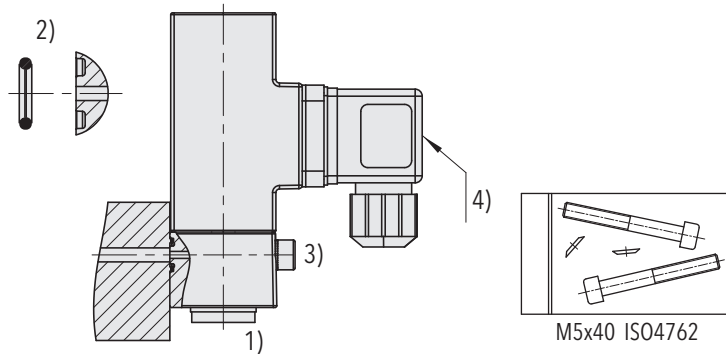


9B4.XXXX.XXX.XX.11

9B4.XXXX.XXX.XX.V3

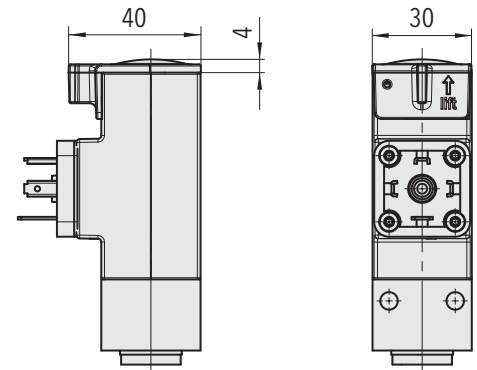

9B4.XXXX.XXX.XX.15

- 1) Torque: G 1/4": $M_A = 32 \dots 40 \text{ Nm}$
- 2) O-Ring: $\varnothing 6.75 \times 1.78$ NBR 90 Sh
- 3) Fixing screw: M5; property class: 8.8; torque: 4.5 ... 6 Nm
- 4) Torque connector center screw: max. 0.4 Nm

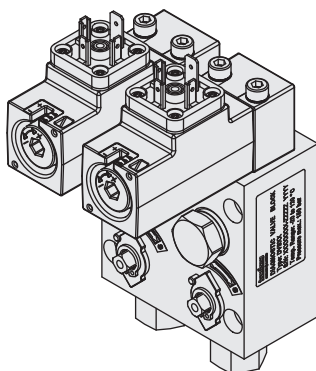

Diagnostic Valve Bloc (DVB)
see specification sheet H72361



Switching differential typ. @ 25°C

Measuring range bellows sensor	[bar] [psi]	-0.6 ... 3.4 -8 ... 45	0 ... 4 0 ... 50	0 ... 6 0 ... 100	1 ... 10 14 ... 150	1 ... 16 14 ... 250	2 ... 25 30 ... 400	4 ... 40 60 ... 500
Microswitch 42/84/33: Switching differential not adjustable	[bar] [psi]	0.2 ± 0.1 4.5	0.2 ± 0.1 4.5	0.2 ± 0.1 4.5	0.4 ± 0.2 9	0.4 ± 0.2 9	1.0 ± 0.6 22	1.2 ± 0.8 26

Electrical data switch

		Rating Resistive Load (Inductive Load)	
Type	Features	AC	DC
42/33 (Standard)	Silver contacts	250 V, 6 (1) A	220 V, 0.25 (0.1) A 110 V, 0.5 (0.2) A 60 V, 1(0.5) A 24 V, 3 (2) A 12 V, 6 (6) A
84	Gold plated contacts, suitable for intrinsically safe control circuits	max. 30 V, 0.1 (0.1) A min. 5 V, 5 mA	

Electrical connection



EN175301-803-A

Additional information

Documents	Data sheet	www.trafag.com/H72367
	Instructions	www.trafag.com/H73367
	Flyer	www.trafag.com/H70655